

We care! Since 1975.

KD50SE-1P

High efficiency multicrystal photovoltaic module



Street lighting, Tunisia

CUTTING-EDGE TECHNOLOGY

► Cell:

- 52 mm × 156 mm
- Polycrystalline, 3-busbar
- >16% efficiency
- Embedded in EVA film
- Patented RIE process: very little light reflection, homogenous dark coloration

► Frame:

- Aluminium, anodised and coated
- Screwed and also adhered
- Strength: 2,400 N/m²
- Drainage openings to protect against frost damage
- Flexible assembly (horizontal and upright)

► Junction box:

- Incl. bypass diodes
- Over-voltage proof Si-p/n bypass diodes
- Accessible junction box for flexible installation

► Pairing:

- Sorting procedure: Nominal output is achieved by two paired modules (≥ 100 Wp for 2 × KD50SE-1P)

► Production:

- Fully automated and integrated production processes in our own production plants
- No intermediate products are purchased
- 100% final inspection

► Service:

- Professional Europe-wide customer service in Esslingen/Germany

COMPANY

As a pioneer in the photovoltaic sector, Kyocera Solar can look back on over 35 years of experience. We are also involved in numerous future-oriented solutions across the world. Our focus is on innovation and quality.


Our vision: To make solar energy accessible to everybody and to ensure a comprehensive sustained energy supply.

TUVdotCOM Service: Internet platform for tested quality and service
 TUVdotCOM-ID: 0000023574
 IEC 61215 ed. 2, IEC 61730 and Safety Class II
 Kyocera is ISO 9001, ISO 14001 and OHSAS18001 certified and registered.




SPECIFICATIONS

in mm

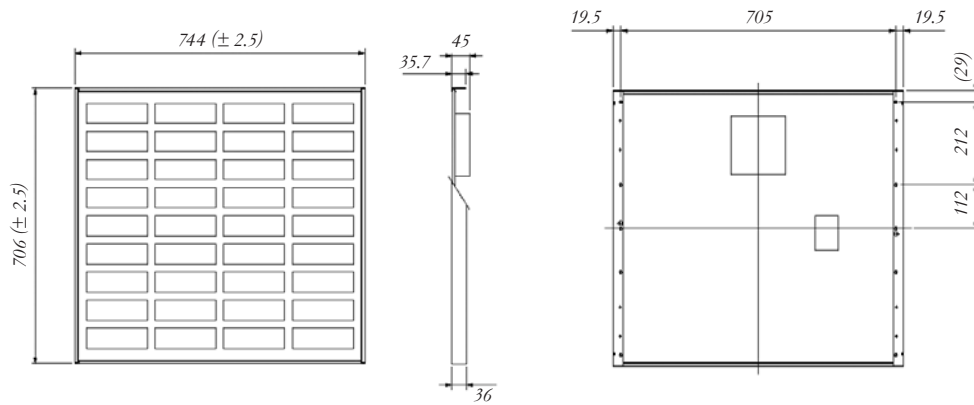


ELECTRICAL CHARACTERISTICS

Current-Voltage characteristics at various cell temperatures

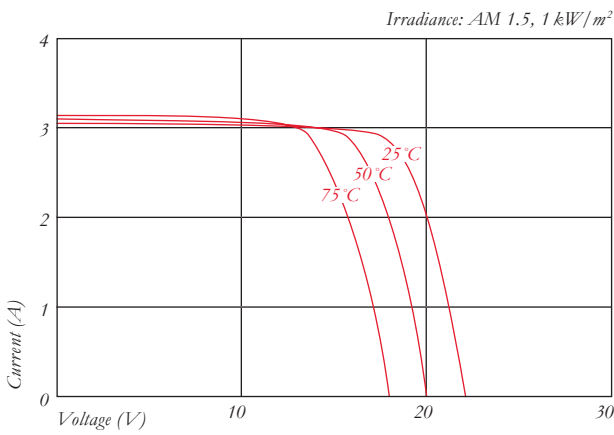

Current-Voltage characteristics at various irradiance levels

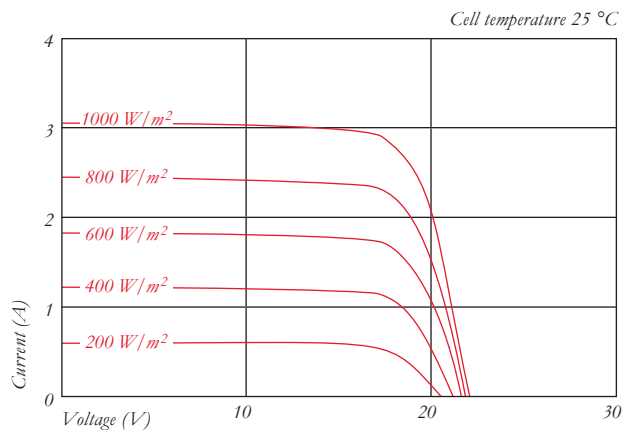

ELECTRICAL PERFORMANCE

| PV Module Type | KD50SE-1P | |
|---|-----------|----------|
| At 1000 W/m² (STC)* | | |
| Maximum Power | [W] | 50 |
| Maximum System Voltage | [V] | 750 |
| Maximum Power Voltage | [V] | 17.9 |
| Maximum Power Current | [A] | 2.8 |
| Open Circuit Voltage (V _{OC}) | [V] | 22.1 |
| Short Circuit Current (I _{SC}) | [A] | 3.07 |
| Efficiency | [%] | 9.5 |
| At 800 W/m² (NOCT)** | | |
| Maximum Power | [W] | 35 |
| Maximum Power Voltage | [V] | 15.8 |
| Maximum Power Current | [A] | 2.24 |
| Open Circuit Voltage (V _{OC}) | [V] | 19.9 |
| Short Circuit Current (I _{SC}) | [A] | 2.50 |
| NOCT | [°C] | 49 |
| Power Tolerance | [%] | +10 / -5 |
| Maximum Reverse Current I _R | [A] | 6 |
| Series Fuse Rating | [A] | 6 |
| Temperature Coefficient of V _{OC} | [%/K] | -0.36 |
| Temperature Coefficient of I _{SC} | [%/K] | 0.06 |
| Temperature Coefficient of Max. Power | [%/K] | -0.46 |
| Reduction of Efficiency (from 1000 W/m ² to 200 W/m ²) | [%] | 2.3 |

DIMENSIONS

| | | |
|----------------------------|-----------------|------------------|
| Length | [mm] | 706 (± 2.5) |
| Width | [mm] | 744 (± 2.5) |
| Depth / incl. Junction Box | [mm] | 36 / 45 |
| Weight | [kg] | 6.5 |
| Connection Type | Screw Terminals | |
| Junction Box | [mm] | 140 × 150 × 37,2 |
| Number of bypass diodes | 2 | |
| IP Code | IP65 | |

CELLS

| | | |
|---------------------|-----------------|----------|
| Number per Module | 36 | |
| Cell Technology | polycrystalline | |
| Cell Shape (square) | [mm] | 52 × 156 |
| Cell Bonding | 3-busbar | |

GENERAL INFORMATION

| | | |
|-----------------------|-----------------------|--|
| Performance Guarantee | 10*** / 20 years **** | |
| Warranty | 5 years ***** | |

* Electrical values under standard test conditions (STC): irradiation of 1000 W/m², airmass AM 1.5 and cell temperature of 25 °C

** Electrical values under normal operating cell temperature (NOCT): irradiation of 800 W/m², airmass AM 1.5, wind speed of 1 m/s and ambient temperature of 20 °C

*** 10 years on 90% of the minimally specified power P under standard test conditions (STC)

**** 20 years on 80% of the minimally specified power P under standard test conditions (STC)

***** In the case of Europe

Your local Kyocera dealer:



KYOCERA Fin ceramics GmbH
Solar Division
 Fritz-Mueller-Strasse 27
 73730 Esslingen / Germany
 Tel: +49 (0)711-93 93 49 99
 Fax: +49 (0)711-93 93 49 50
 E-Mail: solar@kyocera.de
 www.kyocerasolar.de